


# ALTHEA07W 20W 1-Port USB-C PD Charger, PD 3.0

## Product Images

---

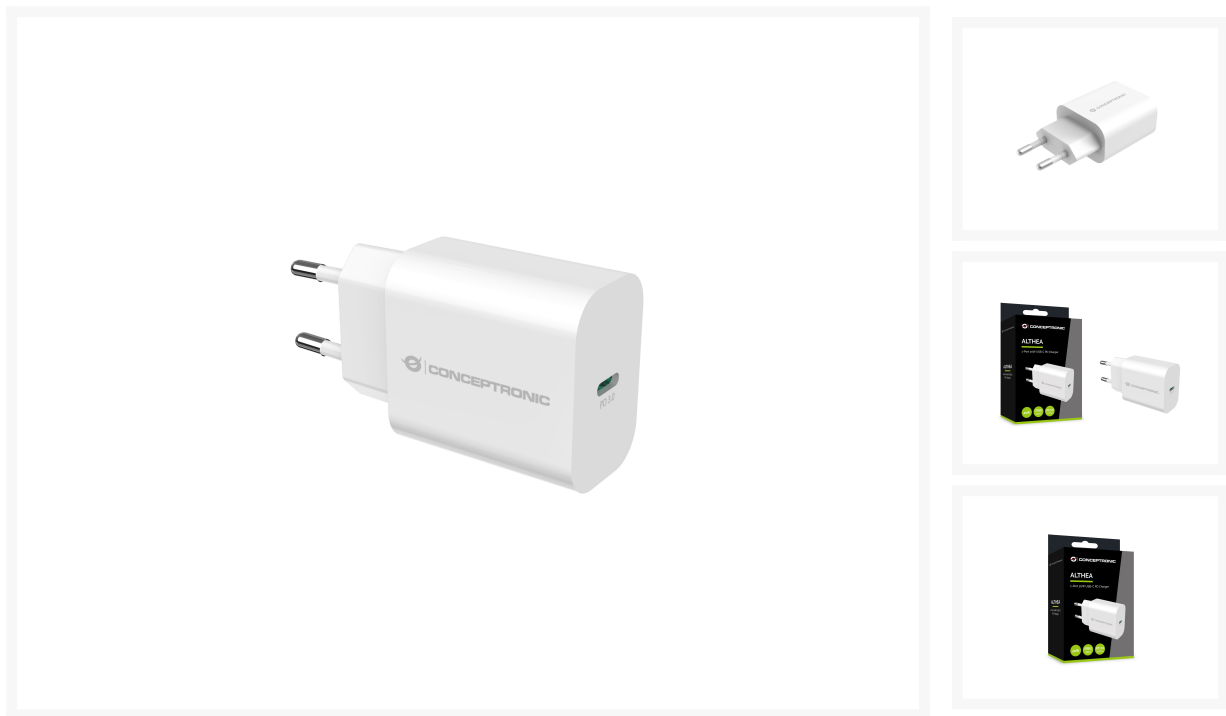

## Short Description

---

- **Dedicated Port Connector:** Equipped with a USB-C ports (with PD 3.0), providing up to 20W of total power and high-speed charging for a wide range of devices with varying power requirement.
- **Wide Compatibility:** Supports a range of output options from 5.0V to 12.0V across its ports, ensuring compatibility with devices from smartphones to laptops.
- **Enhanced Safety Features:** Built-in protections against overload, short circuiting, and overheating, ensuring the safety of both the charger and connected devices.
- **Efficiency and Fast Charging Technology:** Incorporates USB Power Delivery (PD) 3.0 technology for efficient and rapid charging, ensuring broad device compatibility.

## Description

---

This charger is equipped with a dedicated USB-C port featuring Power Delivery (PD) 3.0, providing up to 20W of total power for high-speed charging across a wide range of devices. It supports a range of output options from 5.0V to 12.0V, ensuring compatibility with devices from smartphones to laptops. Enhanced safety features include built-in protections against overload, short-circuiting, and overheating, ensuring the safety of both the charger and connected devices. Incorporating USB Power Delivery (PD) 3.0 technology, this charger ensures efficient and rapid charging, offering broad device compatibility.

## Additional Information

|                                                   |                                                     |
|---------------------------------------------------|-----------------------------------------------------|
| Port Configuration.                               | USB-C x 1                                           |
| Number of cartons per pallet.                     | 32 piece                                            |
| Package Volume.                                   | 210 cubic_centimeter                                |
| Pallet Net Depth.                                 | 800 millimeter                                      |
| Pallet Net Width.                                 | 1200 millimeter                                     |
| Pallet Net Height.                                | 1700 millimeter                                     |
| Power Plug Type.                                  | EU                                                  |
| USB Power Delivery revision                       | 3.0                                                 |
| Number of simultaneously connected devices (max). | 1                                                   |
| Port 1 Power Output.                              | USB-C output: DC 5.0V/3.0A, 9.0V/2.22A, 12.0V/1.67A |
| Programmable power supply (PPS) (YES/NO).         | No                                                  |
| USB Type-C ports quantity.                        | 1                                                   |
| Fast charging technology.                         | Power Delivery 3.0                                  |
| Number of outputs.                                | 1                                                   |
| Housing Material.                                 | Polycarbonate (PC)                                  |
| Harmonized System (HS) code.                      | 850440                                              |
| Customs product code (TARIC).                     | 8504408390                                          |
| Quantity per Pallet.                              | 3200 piece                                          |
| Input current.                                    | 0.5 ampere                                          |
| Maximum AC Input.                                 | 240 volt                                            |
| Minimum AC Input.                                 | 100 volt                                            |
| Maximum power.                                    | 20 watt                                             |
| Power Protection Features.                        | Over current, Over power, Short circuit             |
| Sustainability Compliance.                        | No                                                  |

|                                        |                                                 |
|----------------------------------------|-------------------------------------------------|
| Operating temperature (T-T) Max.       | 40 celsius                                      |
| Operating temperature (T-T) Min.       | 0 celsius                                       |
| Storage relative humidity (H-H) Max.   | 95%                                             |
| Storage relative humidity (H-H) Min.   | 5%                                              |
| Operating relative humidity (H-H) Max. | 80%                                             |
| Operating relative humidity (H-H) Min. | 10%                                             |
| Storage temperature (T-T) Max.         | 80 celsius                                      |
| Storage temperature (T-T) Min.         | -20 celsius                                     |
| Quantity per Pack.                     | 1 piece                                         |
| Package Depth.                         | 100 millimeter                                  |
| Package Height.                        | 70 millimeter                                   |
| Package Width.                         | 30 millimeter                                   |
| Product Gross Weight.                  | 10 gram                                         |
| Package Content.                       | Quick installation guide                        |
| Operating humidity.                    | 10% RH ~ 80% RH                                 |
| Operating temperature.                 | 0°C ~ 40°C                                      |
| Storage humidity.                      | 5% RH ~ 95% RH                                  |
| Storage temperature.                   | -20°C ~ 80°C                                    |
| Package Contents.                      | ALTHEA07W Multilingual quick installation guide |
| Color.                                 | White                                           |
| EAN.                                   | 4015867230046                                   |
| Model Number.                          | ALTHEA07W                                       |
| Product weight (kg).                   | 0.055                                           |
| Dimensions (W x D x H).                | 40.2 x 43.5 x 26 mm                             |
| Product Height.                        | 26 millimeter                                   |
| Product Width.                         | 40.2 millimeter                                 |
| Product Depth.                         | 43.5 millimeter                                 |

Product Net Weight.

55 gram

Power input.

AC 100.0-240.0V, 0.5A max, 50/60Hz

