


ALTHEA10W 25W 1-Port USB-C PD Charger, PPS, PD 3.0

Product Images

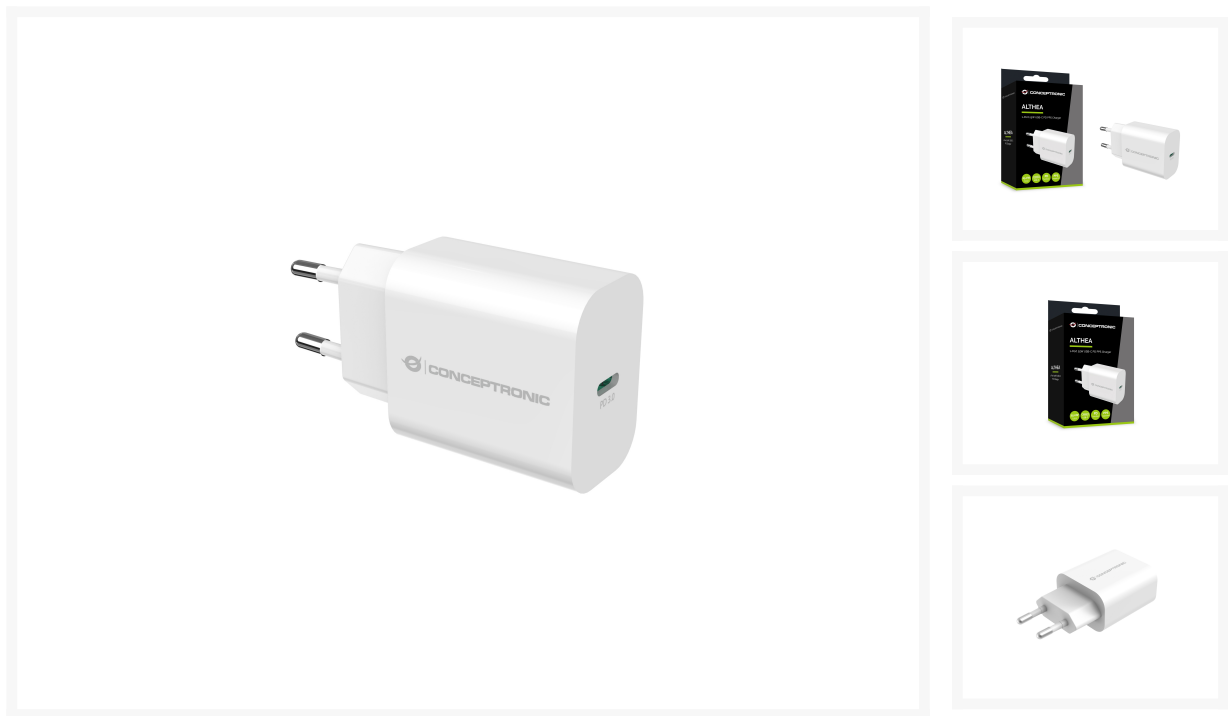

Short Description

- **Dedicated Port Connector:** Equipped with a USB-C ports (with PD 3.0), providing up to 25W of total power and high-speed charging for a wide range of devices with varying power requirement.
- **Wide Compatibility:** Supports a range of output options from 3.3V to 12.0V across its ports, ensuring compatibility with devices from smartphones to laptops.
- **Enhanced Safety Features:** Built-in protections against overload, short circuiting, and overheating, ensuring the safety of both the charger and connected devices.
- **Efficiency and Fast Charging Technology:** Incorporates USB Power Delivery (PD) 3.0 for rapid charging, along with Programmable Power Supply (PPS) compliance to maximize charging efficiency and minimize heat generation.

Description

This charger is equipped with a dedicated USB-C port with PD 3.0, providing up to 25W of total power for high-speed charging of a wide range of devices with varying power requirements. It supports a range of output options from 3.3V to 12.0V, ensuring compatibility with devices from smartphones to laptops. The charger also features enhanced safety protections against overload, short-circuiting, and overheating, ensuring the safety of both the charger and connected devices. Additionally, it incorporates USB Power Delivery (PD) 3.0 for rapid charging, along with Programmable Power Supply (PPS) compliance to maximize charging efficiency and minimize heat generation.

Additional Information

Port Configuration.	USB-C
Number of cartons per pallet.	64 piece
Package Volume.	147 cubic_centimeter
Pallet Net Depth.	800 millimeter
Pallet Net Width.	1200 millimeter
Pallet Net Height.	1700 millimeter
Power Plug Type.	EU
USB Power Delivery revision	3.0
Number of simultaneously connected devices (max).	1
Port 1 Power Output.	USB-C output: DC 3.3-5.9V/3A, 3.3-11V/2.75A (PPS); 5V/3A, 9V/2.77A, 12V/2.1A (PD)
Programmable power supply (PPS) (YES/NO).	Yes
USB Type-C ports quantity.	1
Fast charging technology.	Power Delivery 3.0, Programmable Power Supply (PPS)
Number of outputs.	1
Housing Material.	Polycarbonate (PC)
Harmonized System (HS) code.	850440
Customs product code (TARIC).	8504408390
Quantity per Pallet.	6400 piece
Input current.	0.6 ampere
Maximum AC Input.	240 volt
Minimum AC Input.	100 volt
Maximum power.	25 watt
Power Protection Features.	Over current, Over power, Short circuit
Sustainability Compliance.	No

Operating temperature (T-T) Max.	40 celsius
Operating temperature (T-T) Min.	0 celsius
Storage relative humidity (H-H) Max.	95%
Storage relative humidity (H-H) Min.	5%
Operating relative humidity (H-H) Max.	80%
Operating relative humidity (H-H) Min.	10%
Storage temperature (T-T) Max.	80 celsius
Storage temperature (T-T) Min.	-20 celsius
Quantity per Pack.	1 piece
Package Depth.	30 millimeter
Package Height.	70 millimeter
Package Width.	70 millimeter
Product Gross Weight.	10 gram
Approval and Compliance.	CE, ERP, RoHS
Package Content.	Quick installation guide
Operating humidity.	10% RH ~ 80% RH
Operating temperature.	0°C ~ 40°C
Storage humidity.	5% RH ~ 95% RH
Storage temperature.	-20°C ~ 80°C
Package Contents.	ALTHEA10W Multilingual quick installation guide
Color.	White
EAN.	4015867230862
Model Number.	ALTHEA10W
Product weight (kg).	0.057
Dimensions (W x D x H).	40.2 x 26 x 43.5 mm
Product Height.	43.5 millimeter
Product Width.	40.2 millimeter

Product Depth.	26 millimeter
Product Net Weight.	57 gram
Power input.	100.0-240.0V, 0.6A max, 50/60Hz

