


ALTHEA11W 33W 2-Port USB PD Charger, USB-C x 1, USB-A x 1, QC 3.0, PPS, PD 3.0

Product Images

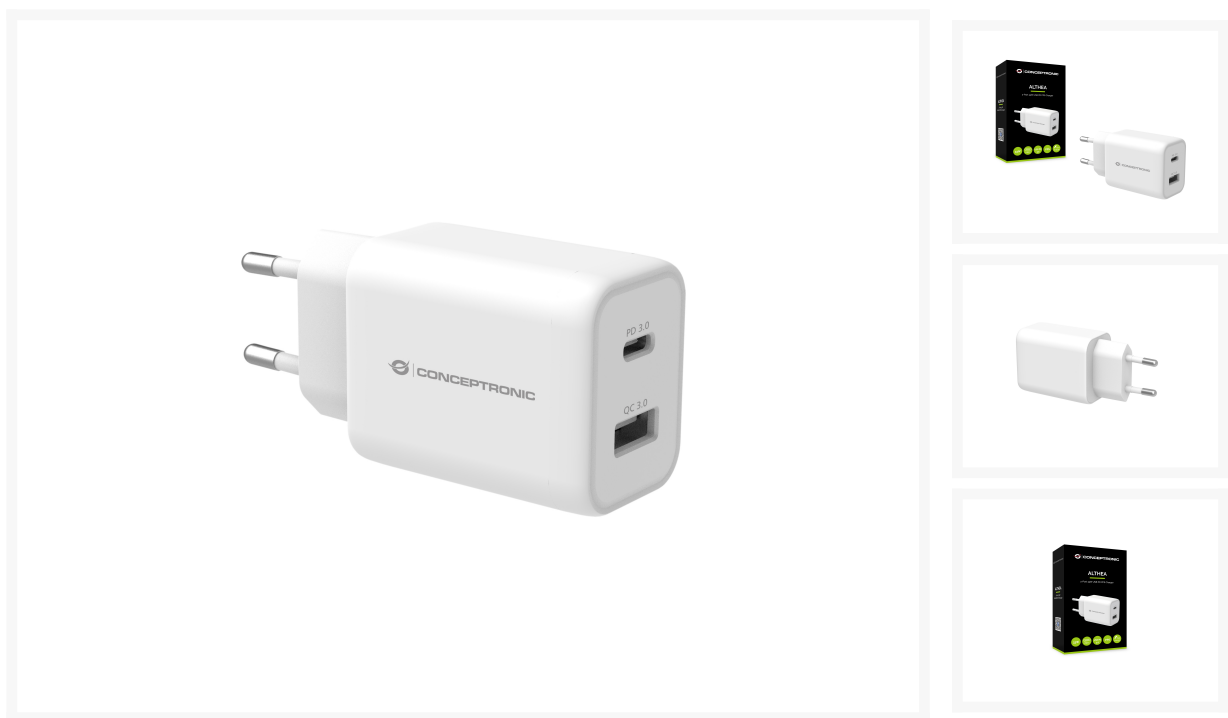

Short Description

- **Versatile Port Selection:** Equipped with 2 ports including 1 USB-C ports (with PD 3.0) and 1 USB-A ports (with QC 3.0), providing up to 33W and allowing simultaneous charging for multiple devices with varying power requirements.
- **Wide Compatibility:** Supports a range of output options from 3.3V to 20.0V across its ports, ensuring compatibility with devices from smartphones to laptops.
- **Enhanced Safety Features:** Built-in protections against overload, short circuiting, and overheating, ensuring the safety of both the charger and connected devices.
- **Efficiency and Fast Charging Technology:** Incorporates USB Power Delivery (PD) 3.0 and Quick Charge (QC) 3.0 technologies for rapid charging, along with Programmable Power Supply (PPS) compliance to maximize charging efficiency and minimize heat generation.

Description

This charger features a versatile port selection with 2 ports, including 1 USB-C port with Power Delivery (PD) 3.0 and 1 USB-A port with Quick Charge (QC) 3.0, providing up to 33W of power and allowing simultaneous charging for multiple devices with varying power requirements. It supports a range of output options from 3.3V to 20.0V across its ports, ensuring compatibility with devices from smartphones to laptops. Enhanced safety features include built-in protections against overload, short-circuiting, and overheating, ensuring the safety of both the charger and connected devices. Incorporating USB Power Delivery (PD) 3.0 and Quick Charge (QC) 3.0 technologies for rapid charging, along with Programmable Power Supply (PPS) compliance, this charger maximizes charging efficiency and minimizes heat generation.

Additional Information

Number of cartons per pallet.	24 piece
Package Volume.	265.824 cubic_centimeter
Pallet Net Depth.	800 millimeter
Pallet Net Width.	1200 millimeter
Pallet Net Height.	1720 millimeter
Power Plug Type.	EU
USB Power Delivery revision	3.0
Number of simultaneously connected devices (max).	2
Port 2 Power Output.	USB-A output: DC 5V/3A, 9V/3A, 12V/2.5A, 20V/1.5A (QC 3.0)
Port 1 Power Output.	USB-C output: DC 3.3-11V/3A, 3.3-16V/2A (PPS); 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (PD)
Programmable power supply (PPS) (YES/NO).	Yes
USB Type-C ports quantity.	1
Fast charging technology.	Quick Charge 3.0, Power Delivery 3.0, Programmable Power Supply (PPS)
USB Type-A ports quantity.	1
Number of outputs.	2
Housing Material.	Polycarbonate (PC)
Harmonized System (HS) code.	850440
Customs product code (TARIC).	8504408390
Quantity per Pallet.	4800 piece
Input current.	1 ampere
Maximum AC Input.	240 volt
Minimum AC Input.	100 volt
Maximum power.	33 watt

Power Protection Features.	Over current, Over power, Short circuit
Sustainability Compliance.	No
Operating temperature (T-T) Max.	40 celsius
Operating temperature (T-T) Min.	0 celsius
Storage relative humidity (H-H) Max.	90%
Storage relative humidity (H-H) Min.	10%
Operating relative humidity (H-H) Max.	80%
Operating relative humidity (H-H) Min.	20%
Storage temperature (T-T) Max.	80 celsius
Storage temperature (T-T) Min.	-20 celsius
Quantity per Pack.	1 piece
Package Depth.	71 millimeter
Package Height.	117 millimeter
Package Width.	32 millimeter
Product Gross Weight.	10 gram
Package Content.	Quick installation guide
Package Contents.	ALTHEA11W Multilingual quick installation guide
Color.	White
EAN.	4015867227527
Model Number.	ALTHEA11W
Product weight (kg).	0.0665
Dimensions (W x D x H).	40.2 x 65.7 x 30 mm
Product Height.	30 millimeter
Product Width.	40.2 millimeter
Product Depth.	65.7 millimeter
Product Net Weight.	66.5 gram
Power input.	AC 100-240V 50/60Hz

