



351020 USB 1D Barcode Scanner, with Stand

Product Images

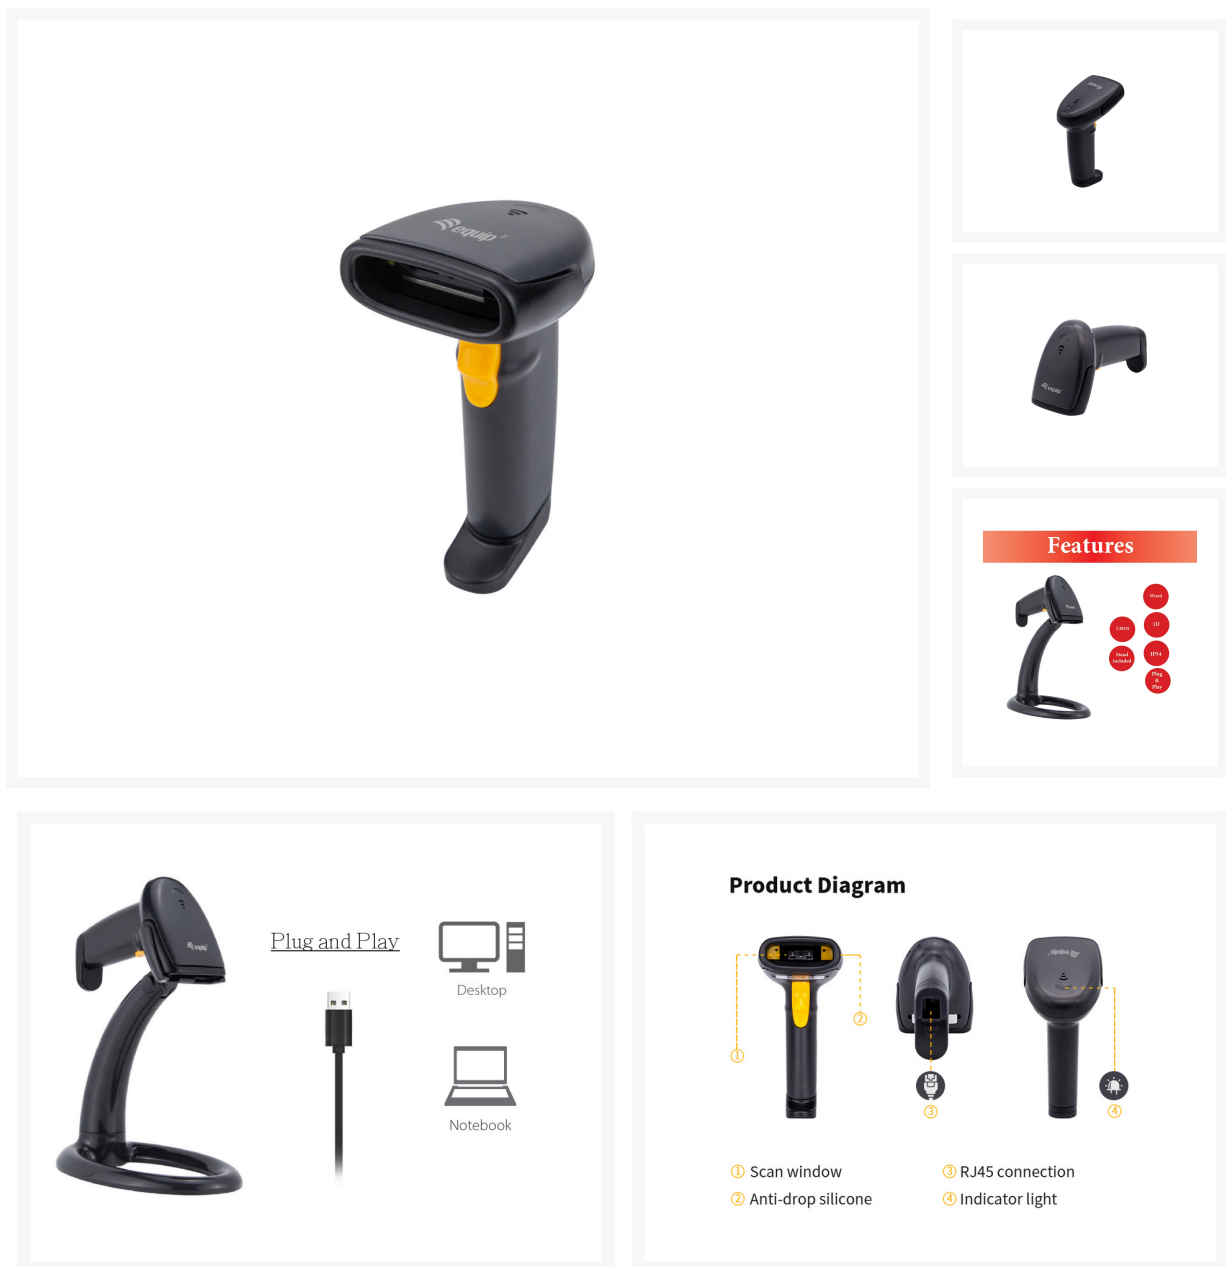

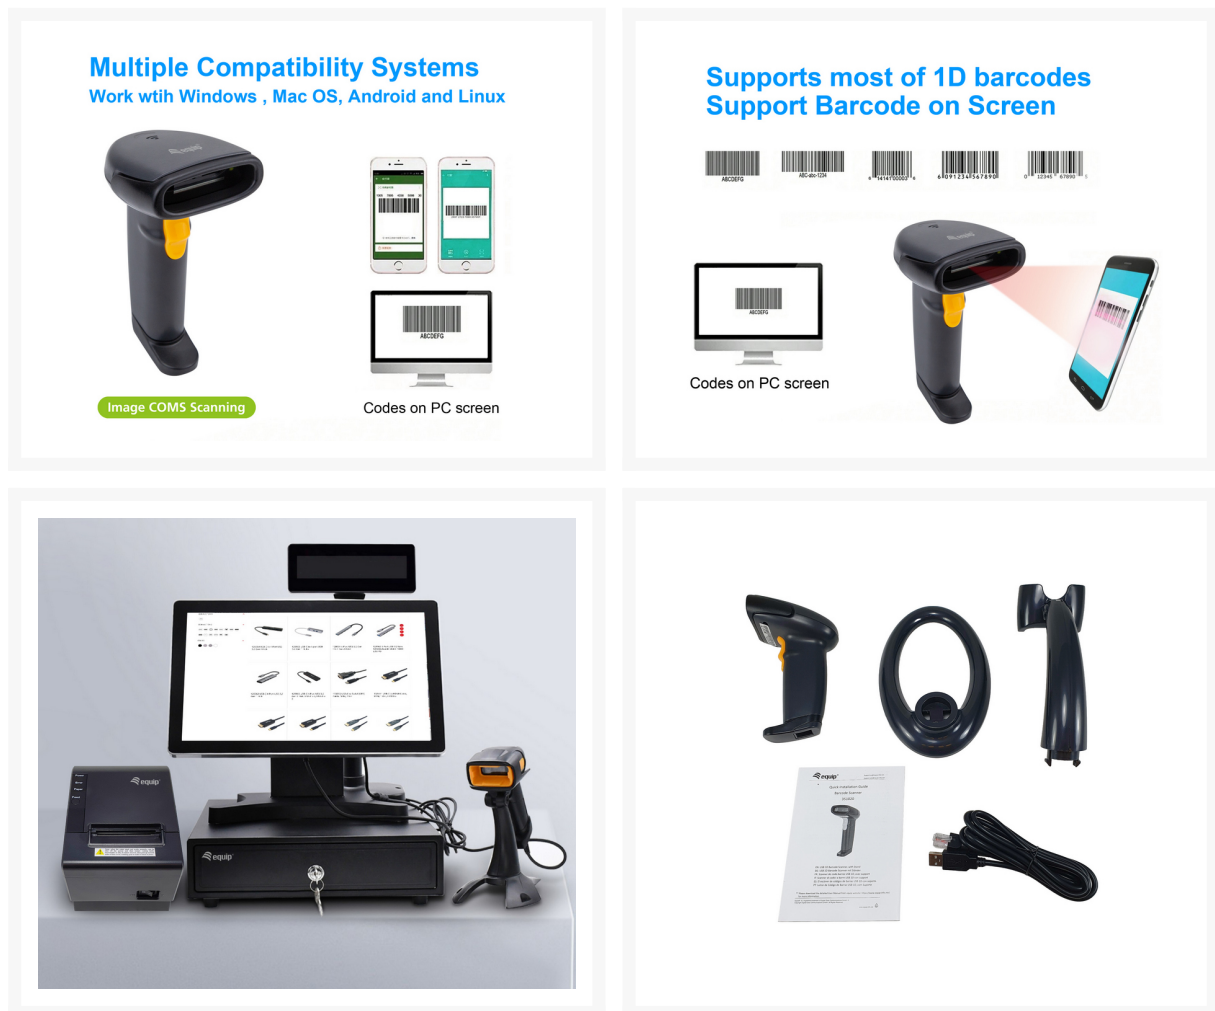

Short Description

- 1D CMOS IMAGE Barcode Scanner
- Precise scanning of 1D barcodes.
- Efficiently deciphers linear barcodes for retail and inventory management.
- Durable Construction: Robust design to withstand daily use and potential drops.
- Protected and water-resistant (IP54).
- Wide Scan Range: Reads barcodes from various distances and angles.
- Multiple Scanning Modes: Options for manual, continuous mode scanning.
- Plug-and-play functionality for quick setup
- Hands-Free Stand Included: Facilitates hands-free operation for high-volume tasks.

Description

The Equip USB 1D Barcode Scanner with Stand is a practical and efficient tool for scanning and managing barcoded information. This device is designed for a wide range of applications, such as retail, inventory management, and point-of-sale systems. With its included stand, it can be used hands-free, reducing user fatigue and enhancing productivity.

The USB connectivity ensures easy integration with your computer or POS system, making it a plug-and-play solution. This 1D barcode scanner is capable of quickly and accurately reading traditional one-dimensional barcodes, simplifying data capture and reducing errors. Its stand allows for convenient presentation-style scanning, perfect for busy checkout counters or warehouses where multiple scans are needed.

This scanner is a cost-effective solution for businesses looking to streamline their operations, improve inventory accuracy, and enhance customer service. It's a reliable tool for organizations seeking a simple and efficient way to manage 1D barcoded information

Additional Information

Harmonized System (HS) code.	847190
Customs product code (TARIC).	8471900000
Decoding Type 1D.	AIM-128, code11, code39, code93, code128, codabar, Deutsche12, Deutsche14, EAN-8, EAN-13, Industrial 25, Interleaved 2 of 5, ISSN, ISBN, ITF-14, MatriX 2 of 5, MSI-Plessey, Plessey, Standard 2 of 5, UPC/EAN-128, UPC-A, UPC-E
Depth of Field.	30~280mm (EAN-13(10mil))
Light Source (color).	Red LED 620-632nm
Protection.	IP54
Scan Angle.	Horizontal : 55°, Vertical : 65°
Scan Distance.	1100mm
Scan Speed.	200 Scans / per sec
Trigger Mode.	Manual, Continuous Scan
Connection mode.	Wired
Approval and Compliance.	CE, RoHS
Operating humidity.	20% RH ~ 95% RH
Operating temperature.	0°C ~ 50°C
Compatible operating systems.	WIN XP/7/8/9/10 Android IOS LINUX
Storage temperature.	-20°C ~ 70°C
Package Contents.	Barcode Scanner Quick Installation Guide Holder Stand
Color.	Black
EAN.	4015867231661
Model Number.	351020
Cable Length.	1.8m
Dimensions (W x D x H).	69 x 91 x 155 mm
Product weight (kg).	0.121
Wireless connection.	No
Material.	ABS
Power supply.	USB DC 5V / 100mA
Resolution.	≥ 5mil

