


DONN15G 12-in-1 USB-C MST Docking Station, Dual HDMI 4K 30Hz, VGA 1080p 60Hz, USB-C PD 100W, USB-C Data, USB 3.0/USB 2.0 5Gbps, SD/TF, Gigabit Ethernet 1000Mbps, 3.5mm Audio

Product Images



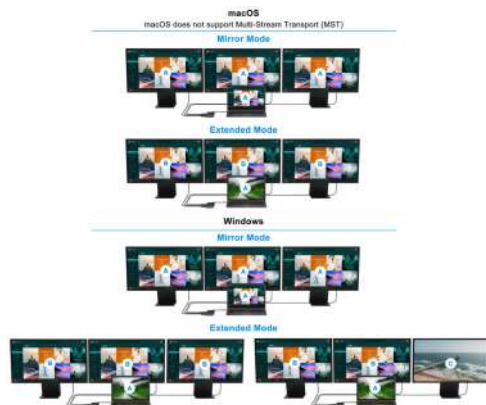

USB-C DP Alt mode(DP1.4)MST			
Item	Single video output	Dual video output	Triple video output
HDMI 1	3840 x 2160/30Hz	1920 x 1080/60Hz	1920 x 1080/60Hz
HDMI 2	3840 x 2160/30Hz	1920 x 1080/60Hz	1920 x 1080/60Hz
VGA	1920 x 1080/60Hz	1920 x 1080/60Hz	1920 x 1080/60Hz

Short Description

- **Connector:** 12-in-1 USB-C to HDMI/VGA/USB-C PD/USB-C data/USB 3.0/USB 2.0/SD/TF/GbE/AUX multiport adapter
- **Video output:** Dual HDMI up to 4K 30Hz; VGA up to 1080p 60Hz
- **Display mode:** Supports dual extended-mode displays (MST on Windows); HDMI and VGA simultaneously
- **Power delivery:** USB-C PD pass-through up to 100W
- **Usb ports:** USB-C data, USB 3.0 and USB 2.0 with USB 3.2 Gen 1 SuperSpeed 5Gb/s
- **Ethernet:** Gigabit Ethernet up to 1000Mbps with Wake-on-LAN
- **Card reader:** SD and MicroSD/TF card slots
- **Audio:** 3.5mm audio combo jack
- **Compatibility:** Windows, macOS, ChromeOS
- **Installation:** Simple Plug and Play
- **Cable length:** 25cm

Description

The DONN15G 12-in-1 USB-C MST Docking Station transforms a single USB-C port into a complete connectivity hub, combining HDMI, VGA, USB-C PD, USB-C data, USB 3.0, USB 2.0, SD/TF card readers, Gigabit Ethernet and a 3.5mm audio jack in one compact

solution.

With MST support on Windows devices using USB-C DP Alt Mode, the dock enables extended-mode output to multiple monitors simultaneously, driving two HDMI displays up to 4K 30Hz and one VGA display up to 1080p 60Hz, with HDMI and VGA usable at the same time. This makes it suitable for multi-screen productivity in home offices, corporate workstations and education environments.

The USB-C PD port delivers up to 100W of charging to the host device, while the Gigabit Ethernet port offers wired speeds up to 1000Mbps with Wake-on-LAN capability. USB 3.2 Gen 1 SuperSpeed 5Gb/s support, additional USB 2.0 ports, SD/TF card access and the 3.5mm audio combo jack provide flexible expansion for peripherals, storage and audio across Windows, macOS and ChromeOS systems.

Additional Information

Harmonized System (HS) code.	847180
Customs product code (TARIC).	8471800000
Approval and Compliance.	CE, RoHS
Compatible operating systems.	Windows XP/Vista/7/8/10 MacOS 10.5 or above Android 5.0 or above Linux
Package Contents.	DONN15G Multilingual quick installation guide
Color.	Grey
EAN.	4015867229132
Model Number.	DONN15G
Cable Length.	0.25m
Dimensions (W x D x H).	141 x 58.3 x 16 mm
Product weight (kg).	0.115
USB Power Delivery (PD).	100W
Connector.	USB-C male
Pass-through Charging.	82W
Port Configuration.	HDMI x 2, VGA x 1, USB PD x 1, USB-C 3.0 x 1, USB 3.0 x 2, USB 2.0 x 1, SD x 1, MicroSD/TF x 1, GbE x 1, Audio x 1
Power supply included.	No
Resolutions.	4K 30Hz Single display, 1080P 60Hz Dual display, 1080P 60Hz Triple display
Standards.	HDMI 1.4, USB PD 3.0, USB 3.2 Gen 1, SD 2.0, MicroSD 2.0

